

## Characteristic


- Motor Type
  - 3 Phase DC Brushless Motor
    - Direction of Rotation  
CW and CCW
- Control-Driver circuit built-in.
- Compact, Light Weight and High Output
- High Efficiency
- Low Noise
- Overcurrent and Locked Rotor Protection
- The gear machined output, shaft type is available as an option.



- $\Phi 55 \times L27$
- DC Brushless motor outer rotor type

## Major Characteristic Parameters

	Min.	Nom.	Max.	Units
Operating Voltage	21.6	24	26.4	VDC
Operating Speed	600		3000	min <sup>-1</sup>
Continuous Rating Power			30	W
Rotor Inertia ( Reference Value )		519		g · cm <sup>2</sup>
Operating Temperature	0	20	50	°C
Operating Humidity	15		90	%RH
Motor Weight			240	g

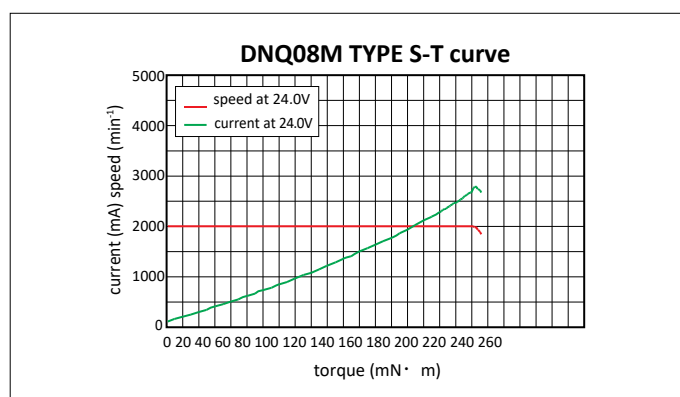

## Outside Dimension (Reference)

