


SS10G (□ 10 x 15mm)

Metal Brush




Weight: 5.8g

Applications

Camera, Robot, Door Lock



External Dimensions

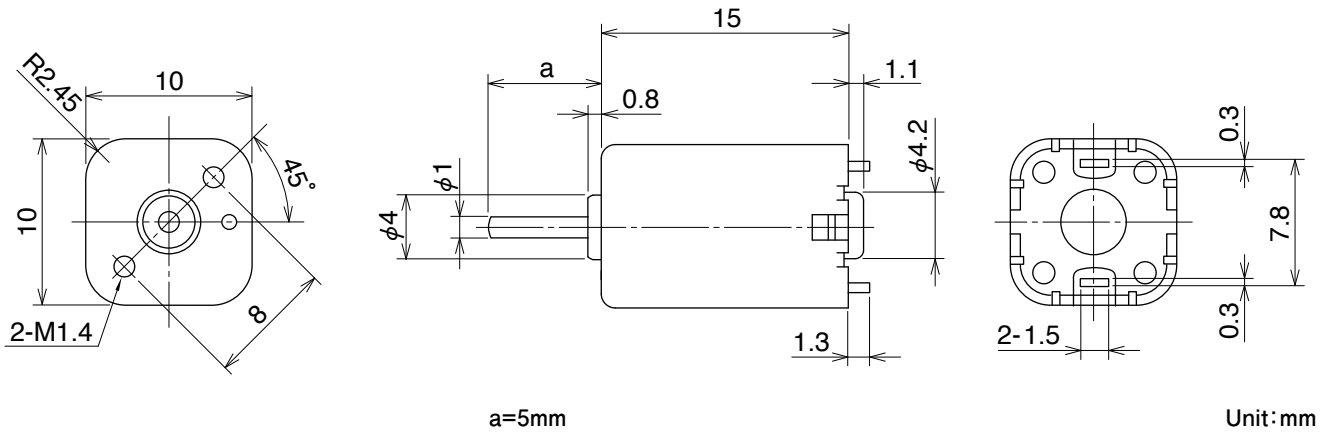

Reference Characteristics

Model	Voltage		No Load		Rated Load		Rated Load		Starting Torque		Starting Current	Shaft Length
	Operating	Rated	Speed	Current			Speed	Current				
	(V)	(V)	(min ⁻¹)	(mA)	(gf·cm)	(mN·m)	(min ⁻¹)	(mA)	(gf·cm)	(mN·m)	(mA)	(mm)
SS10G0RTM	2 to 8	6	9713	26	8.16	0.80	6294	174	23.2	2.27	448	5
SS10G0VTT	2 to 8	6	16335	58	8.16	0.80	12773	298	37.4	3.67	1160	5

Characteristics

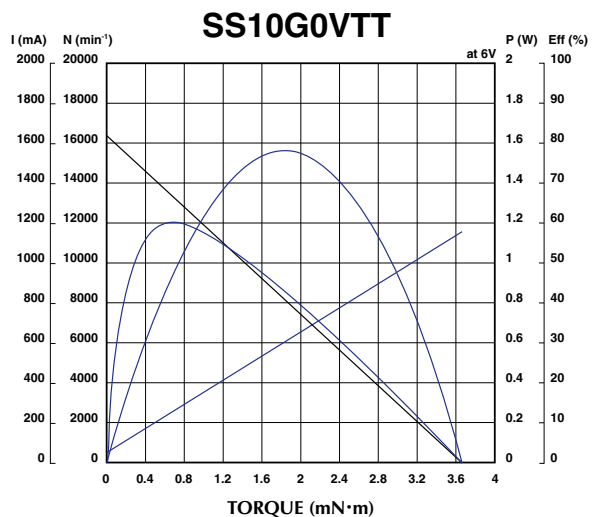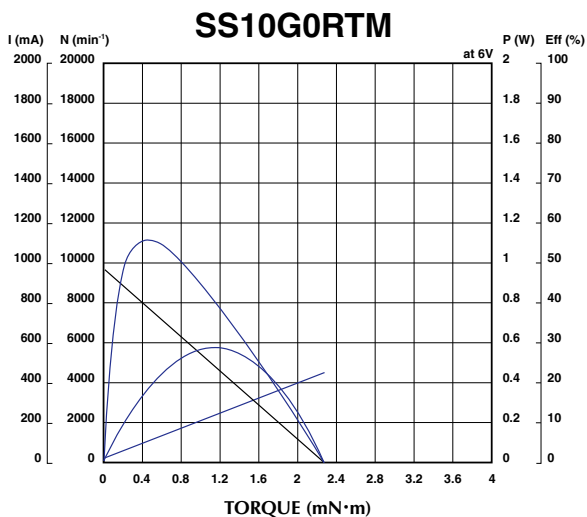

SS10J (□ 10 x 20mm)

Metal Brush




Weight: 8.2g

Applications

Camera, Robot


External Dimensions

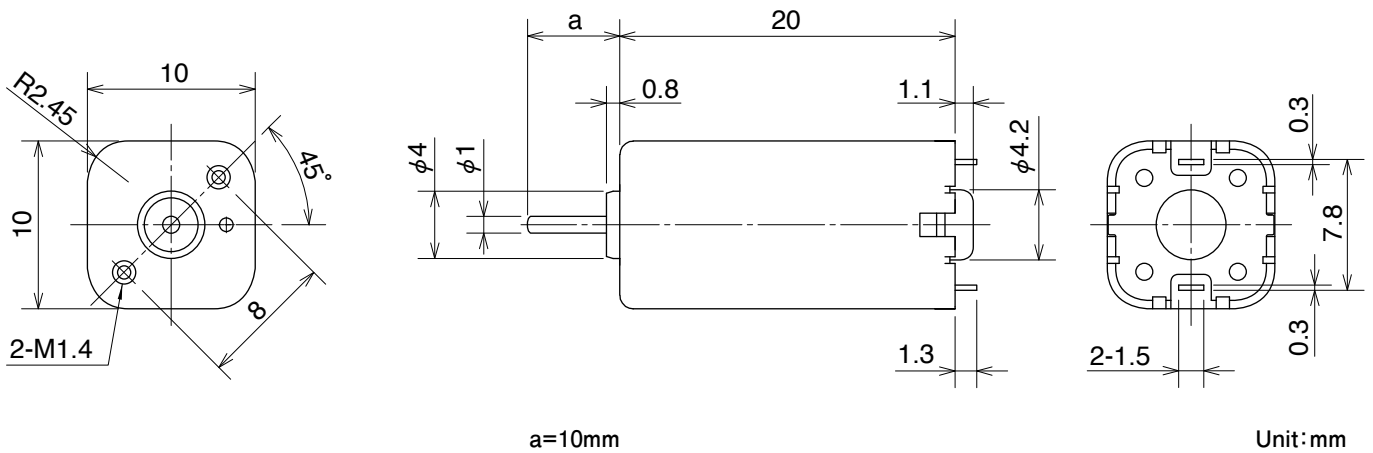

Reference Characteristics


Model	Voltage		No Load		Rated Load		Rated Load		Starting Torque		Starting Current (mA)	Shaft Length (mm)
	Operating	Rated	Speed	Current	Rated Load		Speed (min ⁻¹)	Current (mA)	Starting Torque (gf·cm)	Starting Torque (mN·m)		
	(V)	(V)	(min ⁻¹)	(mA)	(gf·cm)	(mN·m)						
SS10J0TTT	2 to 9	8	9830	28	8.16	0.80	7996	135	43.78	4.28	601	10

Characteristics

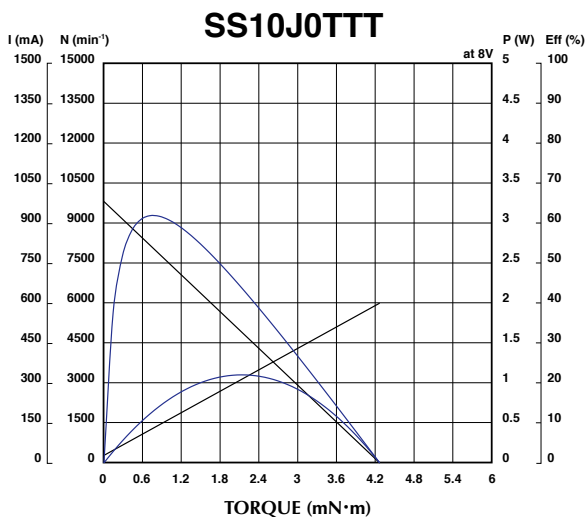

SR10M (□ 10 x 31mm)

Carbon Brush




Weight:12.8g

Applications

Camera, Robot

External Dimensions

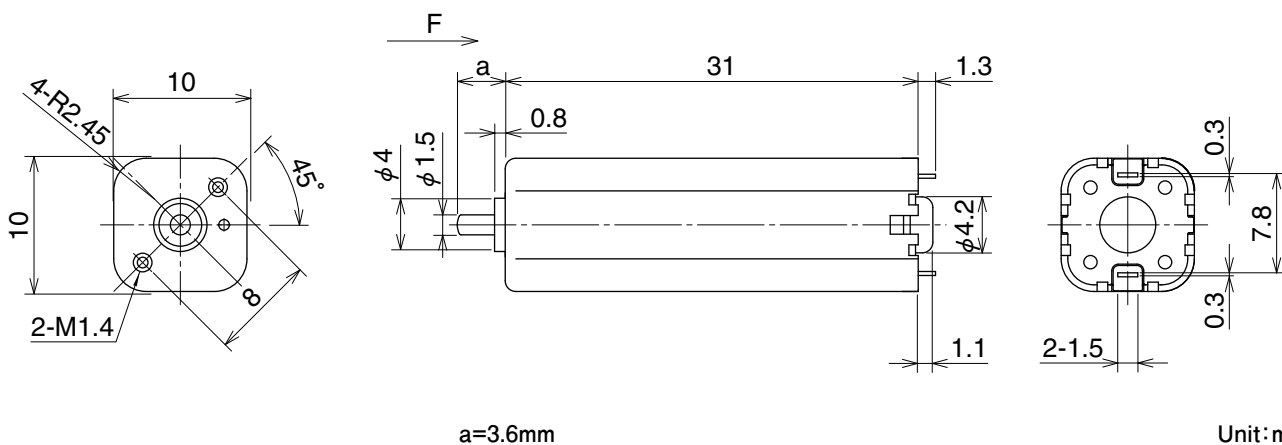

a=3.6mm

Unit: mm

Reference Characteristics

Model	Voltage		No Load		Rated Load		Rated Load		Starting Torque		Starting Current	Shaft Length
	Operating	Rated	Speed	Current			Speed	Current				
	(V)	(V)	(min ⁻¹)	(mA)	(gf·cm)	(mN·m)	(min ⁻¹)	(mA)	(gf·cm)	(mN·m)	(mA)	(mm)
SR10M1ETCA	3 to 9	8	11650	57	34.7	3.40	6430	610	77.4	7.59	1280	3.6

Characteristics

